

**Specifications:**

Current Rating: 0.8A AC/DC  
 Voltage rating: 30V AC/DC  
 Temperature range: -25°C to +85°C  
 Contact resistance: 20mΩ max.  
 Insulation resistance: 100MΩ min.  
 Withstand voltage: 200V AC/minute


**Material:**

Housing: nylon 66, UL94V-0, white

**Mates with:** 1001BRS (header, R/A, SMT type)

Circuits	Dimensions (mm)		
	A	B	C
2	1.00	2.35	4.60
3	2.00	3.35	5.60
4	3.00	4.35	6.60
5	4.00	5.35	7.60
6	5.00	6.35	8.60
7	6.00	7.35	9.60
8	7.00	8.35	10.60
9	8.00	9.35	11.60
10	9.00	10.35	12.60
11	10.00	11.35	13.60
12	11.00	12.35	14.60
13	12.00	13.35	15.60
14	13.00	14.35	16.60

**Part Number Information:**

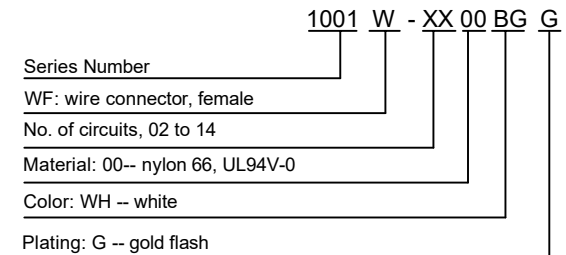

							General Tolerance	<h1>Zeakka Electronics</h1>				Document No.: ZK-1001W						
							.X ±0.3					Title: HOUSING, FEMALE, IDT TYPE, SINGLE ROW, 1.0MM PITCH						
							.XX ±0.2					APPR	CH'K	DRWN	Date	Dimensions	Scale	Version
							.XXX ±0.1					Kai Lee	Cris Wang	Jun Wei	2020.8.7	mm	1:1	A
Date	Version	EC No.	Description	DRWN	CH'K	APPR	THIRD ANGLE PROJECTION											