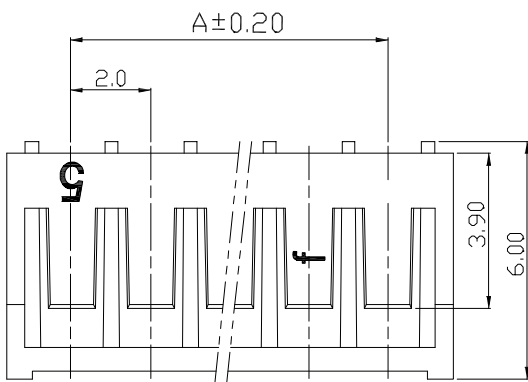
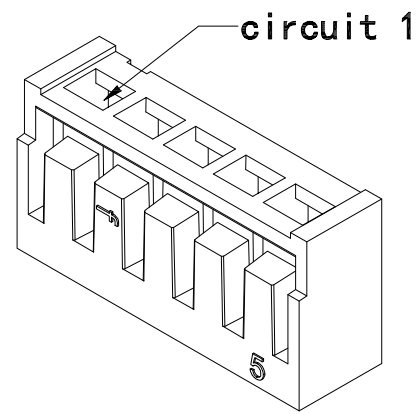
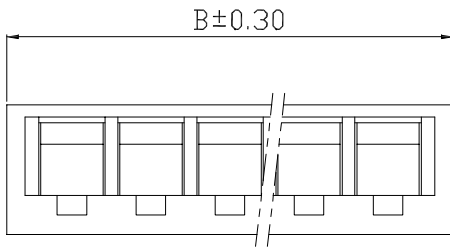


Specifications:

Current Rating: 2.0A AC/DC
Voltage rating: 250V AC/DC
Temperature range: -25°C to +85°C
Contact resistance: 20mΩ max.
Insulation resistance: 1000MΩ min.
Withstand voltage: 800V AC/minute

Material:

Housing: nylon 66, UL94V-0, white

Used with: 2015TV-PT (terminal, vertical)


Circuits	Dimensions (mm)	
	A	B
2	2.00	4.50
3	4.00	6.50
4	6.00	8.50
5	8.00	10.50
6	10.00	12.50
7	12.00	14.50
8	14.00	16.50
9	16.00	18.50
10	18.00	20.50
11	20.00	22.50
12	22.00	24.50
13	24.00	26.50
14	26.00	28.50
15	28.00	30.50

Part Number Information:

2015 BV - XX 00 WH

Series Number
BV: board-in connector, vertical
No. of circuits, 02 to 15
Material: 00-- nylon 66, UL94V-0
Color: WH -- white

							General Tolerance	Zeakka Electronics				Document No.: ZK-2015BV		
							.X ±0.3					Title: HOUSING, BOARD-IN TYPE, VERTICAL, SINGLE ROW, 2.0MM PITCH		
							.XX ±0.2							
							.XXX ±0.1					Dimensions	Scale	Version
Date	Version	EC No.	Description	DRWN	CH'K	APPR	THIRD ANGLE PROJECTION	Kai Lee	Cris Wang	Jun Wei	2020.8.8	mm	1:1	A

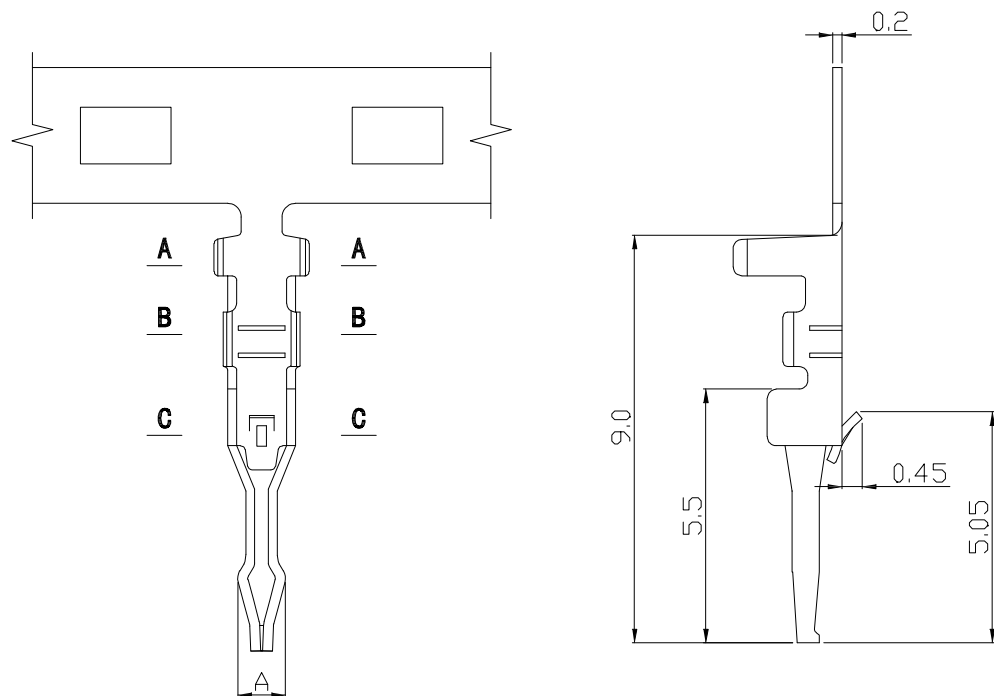

Specifications:


Current Rating: 2.0A AC/DC
 Voltage rating: 250V AC/DC
 Temperature range: -25°C to +85°C
 Contact resistance: 20mΩ max.
 Insulation resistance: 1000MΩ min.
 Withstand voltage: 800V AC/minute
 Applicable wire: AWG30 - AWG24

Material:


Phosphor bronze

Used with: 2015BV (board-in connector, vertical)


Part Number Information:



A-A



B-B





C-C

2015 TV - P T

Series Number
 TV: terminal, vertical
 Material: P -- phosphor bronze
 Plating: T -- tin plating

							General Tolerance	Zeakka Electronics				Document No.: ZK-2015TV		
							.X ±0.3					Title: TERMINAL, BOARD-IN TYPE, PHOSPHOR BRONZE, TIN, REEL		
							.XX ±0.2							
							.XXX ±0.1					Dimensions	Scale	Version
Date	Version	EC No.	Description	DRWN	CH'K	APPR	THIRD ANGLE PROJECTION	Kai Lee	Cris Wang	Jun Wei	2020.8.8	mm	1:1	A

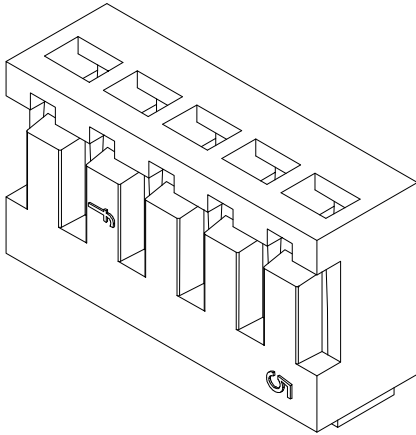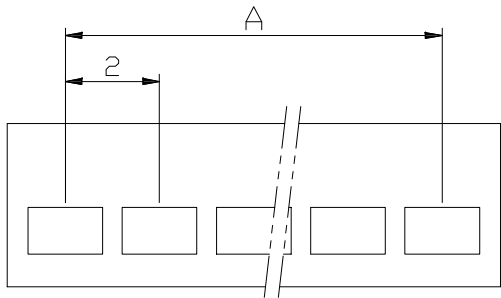

Specifications:



Current Rating: 2.0A AC/DC
Voltage rating: 250V AC/DC
Temperature range: -25°C to +85°C
Contact resistance: 20mΩ max.
Insulation resistance: 1000MΩ min.
Withstand voltage: 800V AC/minute

Material:

Housing: nylon 66, UL94V-0, white

Used with: 2015TR-PT (terminal, R/A)

Circuits	Dimensions (mm)	
	A	B
2	2.00	4.50
3	4.00	6.50
4	6.00	8.50
5	8.00	10.50
6	10.00	12.50
7	12.00	14.50
8	14.00	16.50
9	16.00	18.50
10	18.00	20.50
11	20.00	22.50
12	22.00	24.50
13	24.00	26.50
14	26.00	28.50
15	28.00	30.50

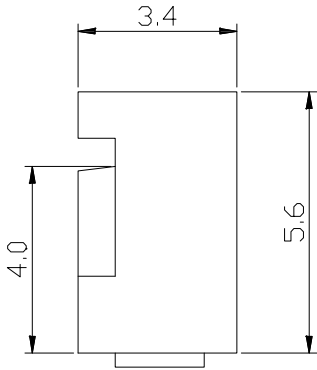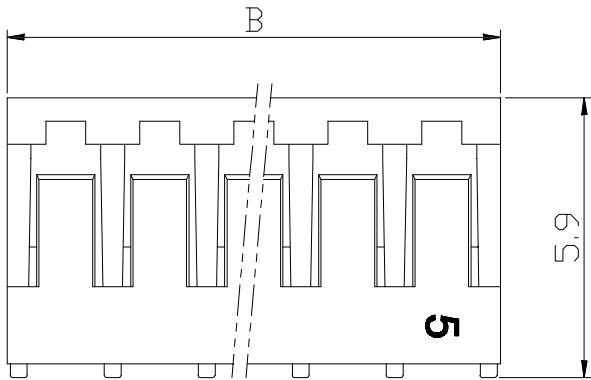

Part Number Information:

2015 BR - XX 00 WH

Series Number
BR: board-in connector, R/A
No. of circuits, 02 to 15
Material: 00-- nylon 66, UL94V-0
Color: WH -- white

							General Tolerance	Zeakka Electronics				Document No.: ZK-2015BR		
							.X ±0.3					Title: HOUSING, BOARD-IN TYPE, R/A, SINGLE ROW, 2.0MM PITCH		
							.XX ±0.2							
							.XXX ±0.1					Dimensions	Scale	Version
Date	Version	EC No.	Description	DRWN	CH'K	APPR	THIRD ANGLE PROJECTION	Kai Lee	Cris Wang	Jun Wei	2020.8.8	mm	1:1	A

Specifications:

Current Rating: 2.0A AC/DC
Voltage rating: 250V AC/DC
Temperature range: -25°C to +85°C
Contact resistance: 20mΩ max.
Insulation resistance: 1000MΩ min.
Withstand voltage: 800V AC/minute
Applicable wire: AWG30 - AWG24

Material:


Phosphor bronze

Used with: 2015BR (board-in connector, R/A)

Part Number Information:

2015 TR - P T

Series Number
TR: terminal, R/A
Material: P -- phosphor bronze
Plating: T -- tin plating

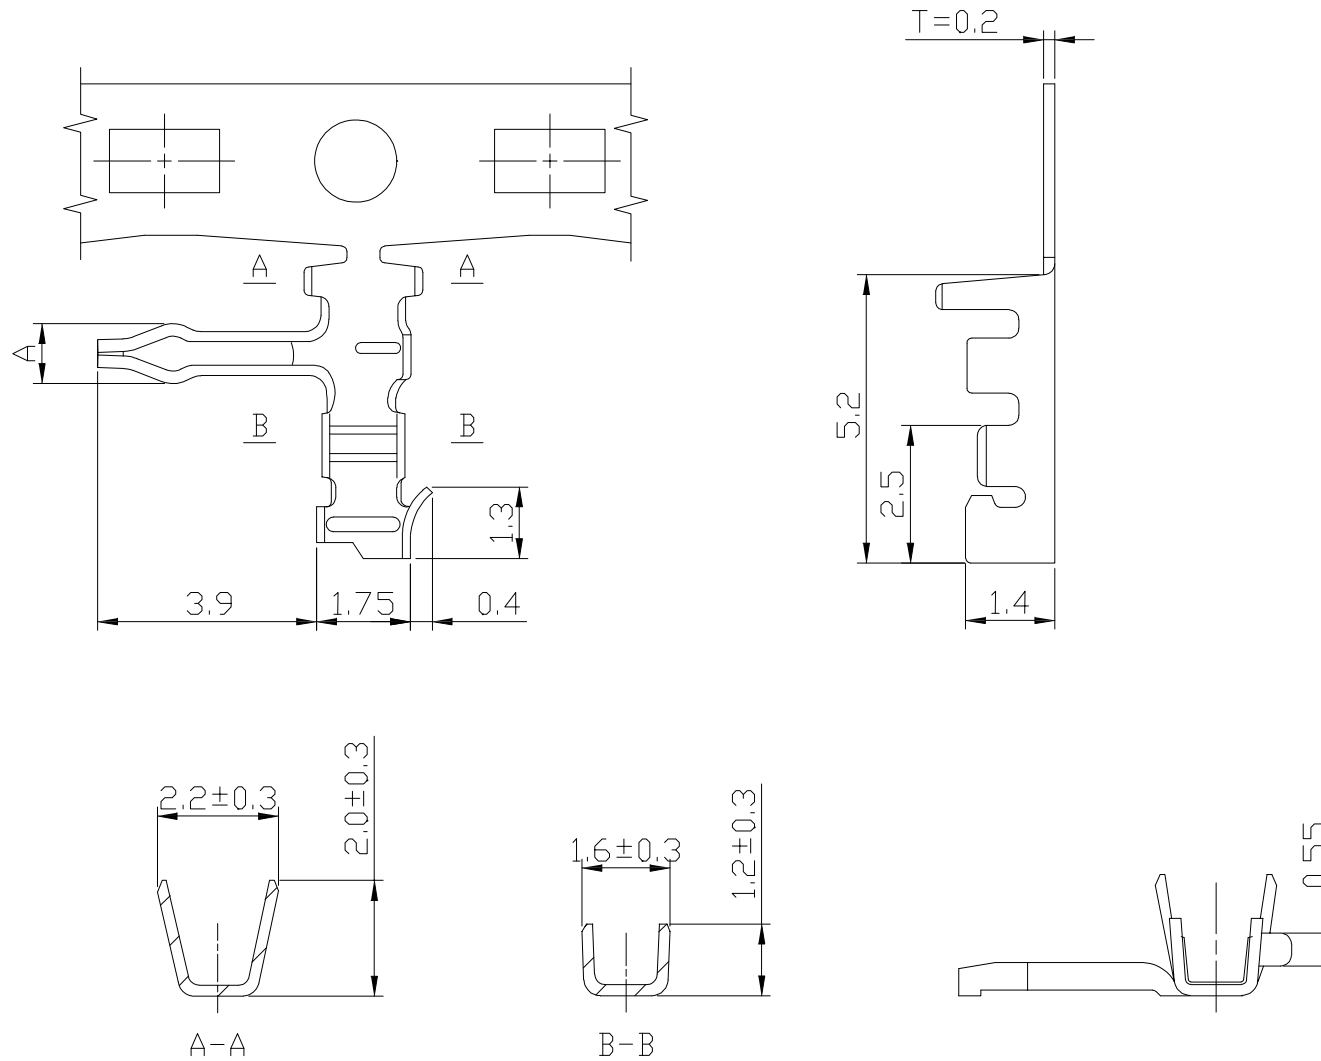

							General Tolerance	Zeakka Electronics				Document No.: ZK-2015TR		
							.X ±0.3					Title: TERMINAL, BOARD-IN TYPE, PHOSPHOR BRONZE, TIN, REEL		
							.XX ±0.2					Dimensions	Scale	Version
							.XXX ±0.1					mm	1:1	A
Date	Version	EC No.	Description	DRWN	CH'K	APPR	THIRD ANGLE PROJECTION	Kai Lee	Cris Wang	Jun Wei	2020.8.8			